
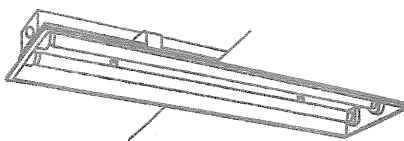
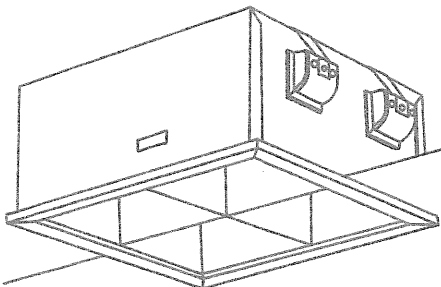


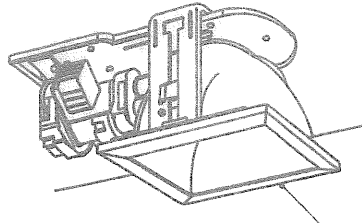
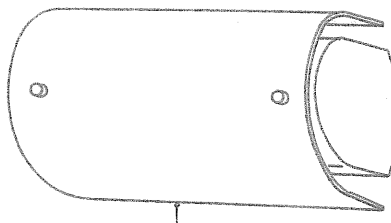







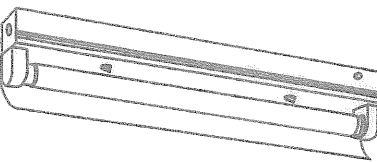



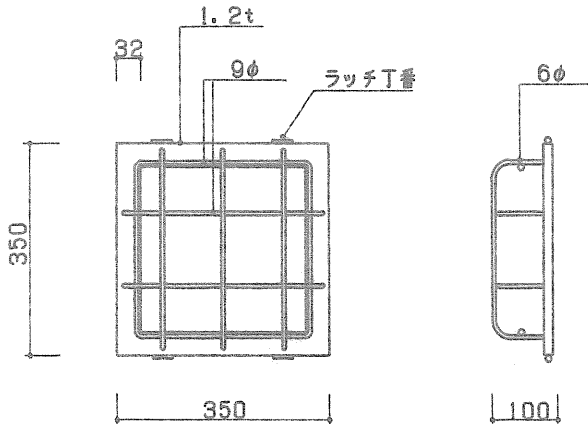


3.西網走コミセン

照 明 器 具 姿 図

A402	FSS4-402	B402	FSS4MP-402	(WP)	C402	FRS2-402	D363	FRL8-P363	E282	FPL 28W×2	F402	FL 40W×2		
A401	FSS4-401						D362	FDL 36W×2						
A202	FSS4-202													
A201	FSS4-201													
A401S	FSS4A-401													
A202S	FSS4A-202													
														
								ルーバ：アルミ鏡面仕上		和風直付				
G271	FDL 27W×1	H271	FRS11S-D271		I181	FDL 18W×1	J201	FBS2-201	L131	FDL 13W×1	(WP)	M60	1L 60W×1	
		H181	FRS11S-D181								SPC(白色)			
		断熱型												
K254	FGL 25W×4	N400	MF400W×1+アンナイト1L250W×1	O40	ISC2-40	P201	高輝度誘導灯(内照方式)20B型(中型)片面	Q30	1L 30W×1(非)ハロゲン球(高天井用)	R201	FBS3-201			
								Q13	K1-1RS4-J13					
								枠：アルミ パネル：アクリル 明るさセンサー付						
		高効率型安定器(200V) 電動昇降装置付		BTT内蔵型		BTT内蔵型		高輝度誘導灯用ガード						
		S151		FCL 15W×1 (電球色) (WP)		T271		FDL 27W×1 (電球色) (WP)	U131			FDL 13W×1		
														
パネル：ガラス		天井取付												

3.西網走コミセン

