
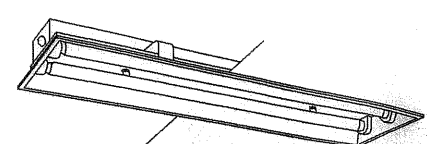
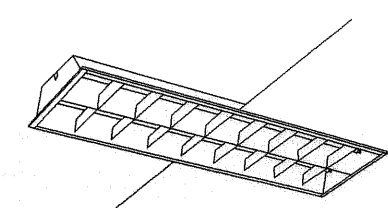
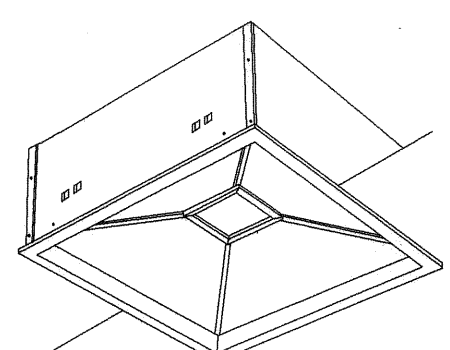


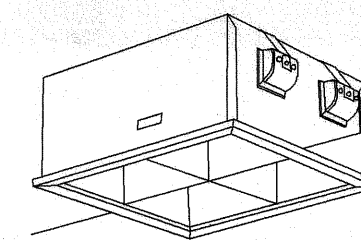



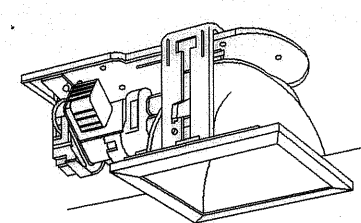
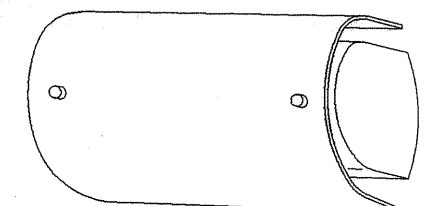
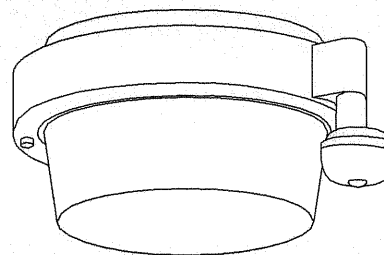


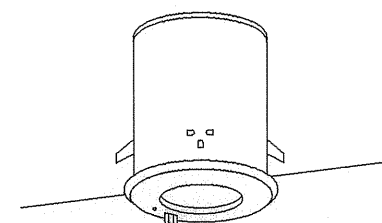





8. 向陽ヶ丘住民センター

8. 同陽ヶ丘住民センター

A401G		FSS4-401 (ガード付)		B402		FSS4MP-402 (WP)		C402		FRS2-402		D402		FRL1-402		E364		FPL 36W×4		F362		FDL 36W×2	
A201B		K1-FSS4-201 (非) BTT内蔵型																					
A202S		FSS4A-202 (SUS)																					
																							
G282		FPL 28W×2		H402		FL 40W×2		I131		FDL 13W×1 断熱型 (SB用)		J271		FRS11-D271		K131		FDL 13W×1		L181		FDL 18W×1	
								J131		FDL 13W×1 断熱型 (SB用)													
ルーバ：アルミ鏡面仕上				和風直付								枠：木製											
M131		FDL 13W×1		N400		MF400W×1+アンナイトIL250W×1		O20B		高輝度誘導灯 (内照方式) 20B型 (中型) 片面		P30		K1-IRS4-J30 (高天井用)									
		 パネル：強化ガラス																					
人感センサー (ON-OFF型) 付																							
HWC6074EL 相当品				高効率型安定器 (200V) 電動昇降装置付				BTT内蔵型				BTT内蔵型											



8. 向陽ヶ丘住民センター

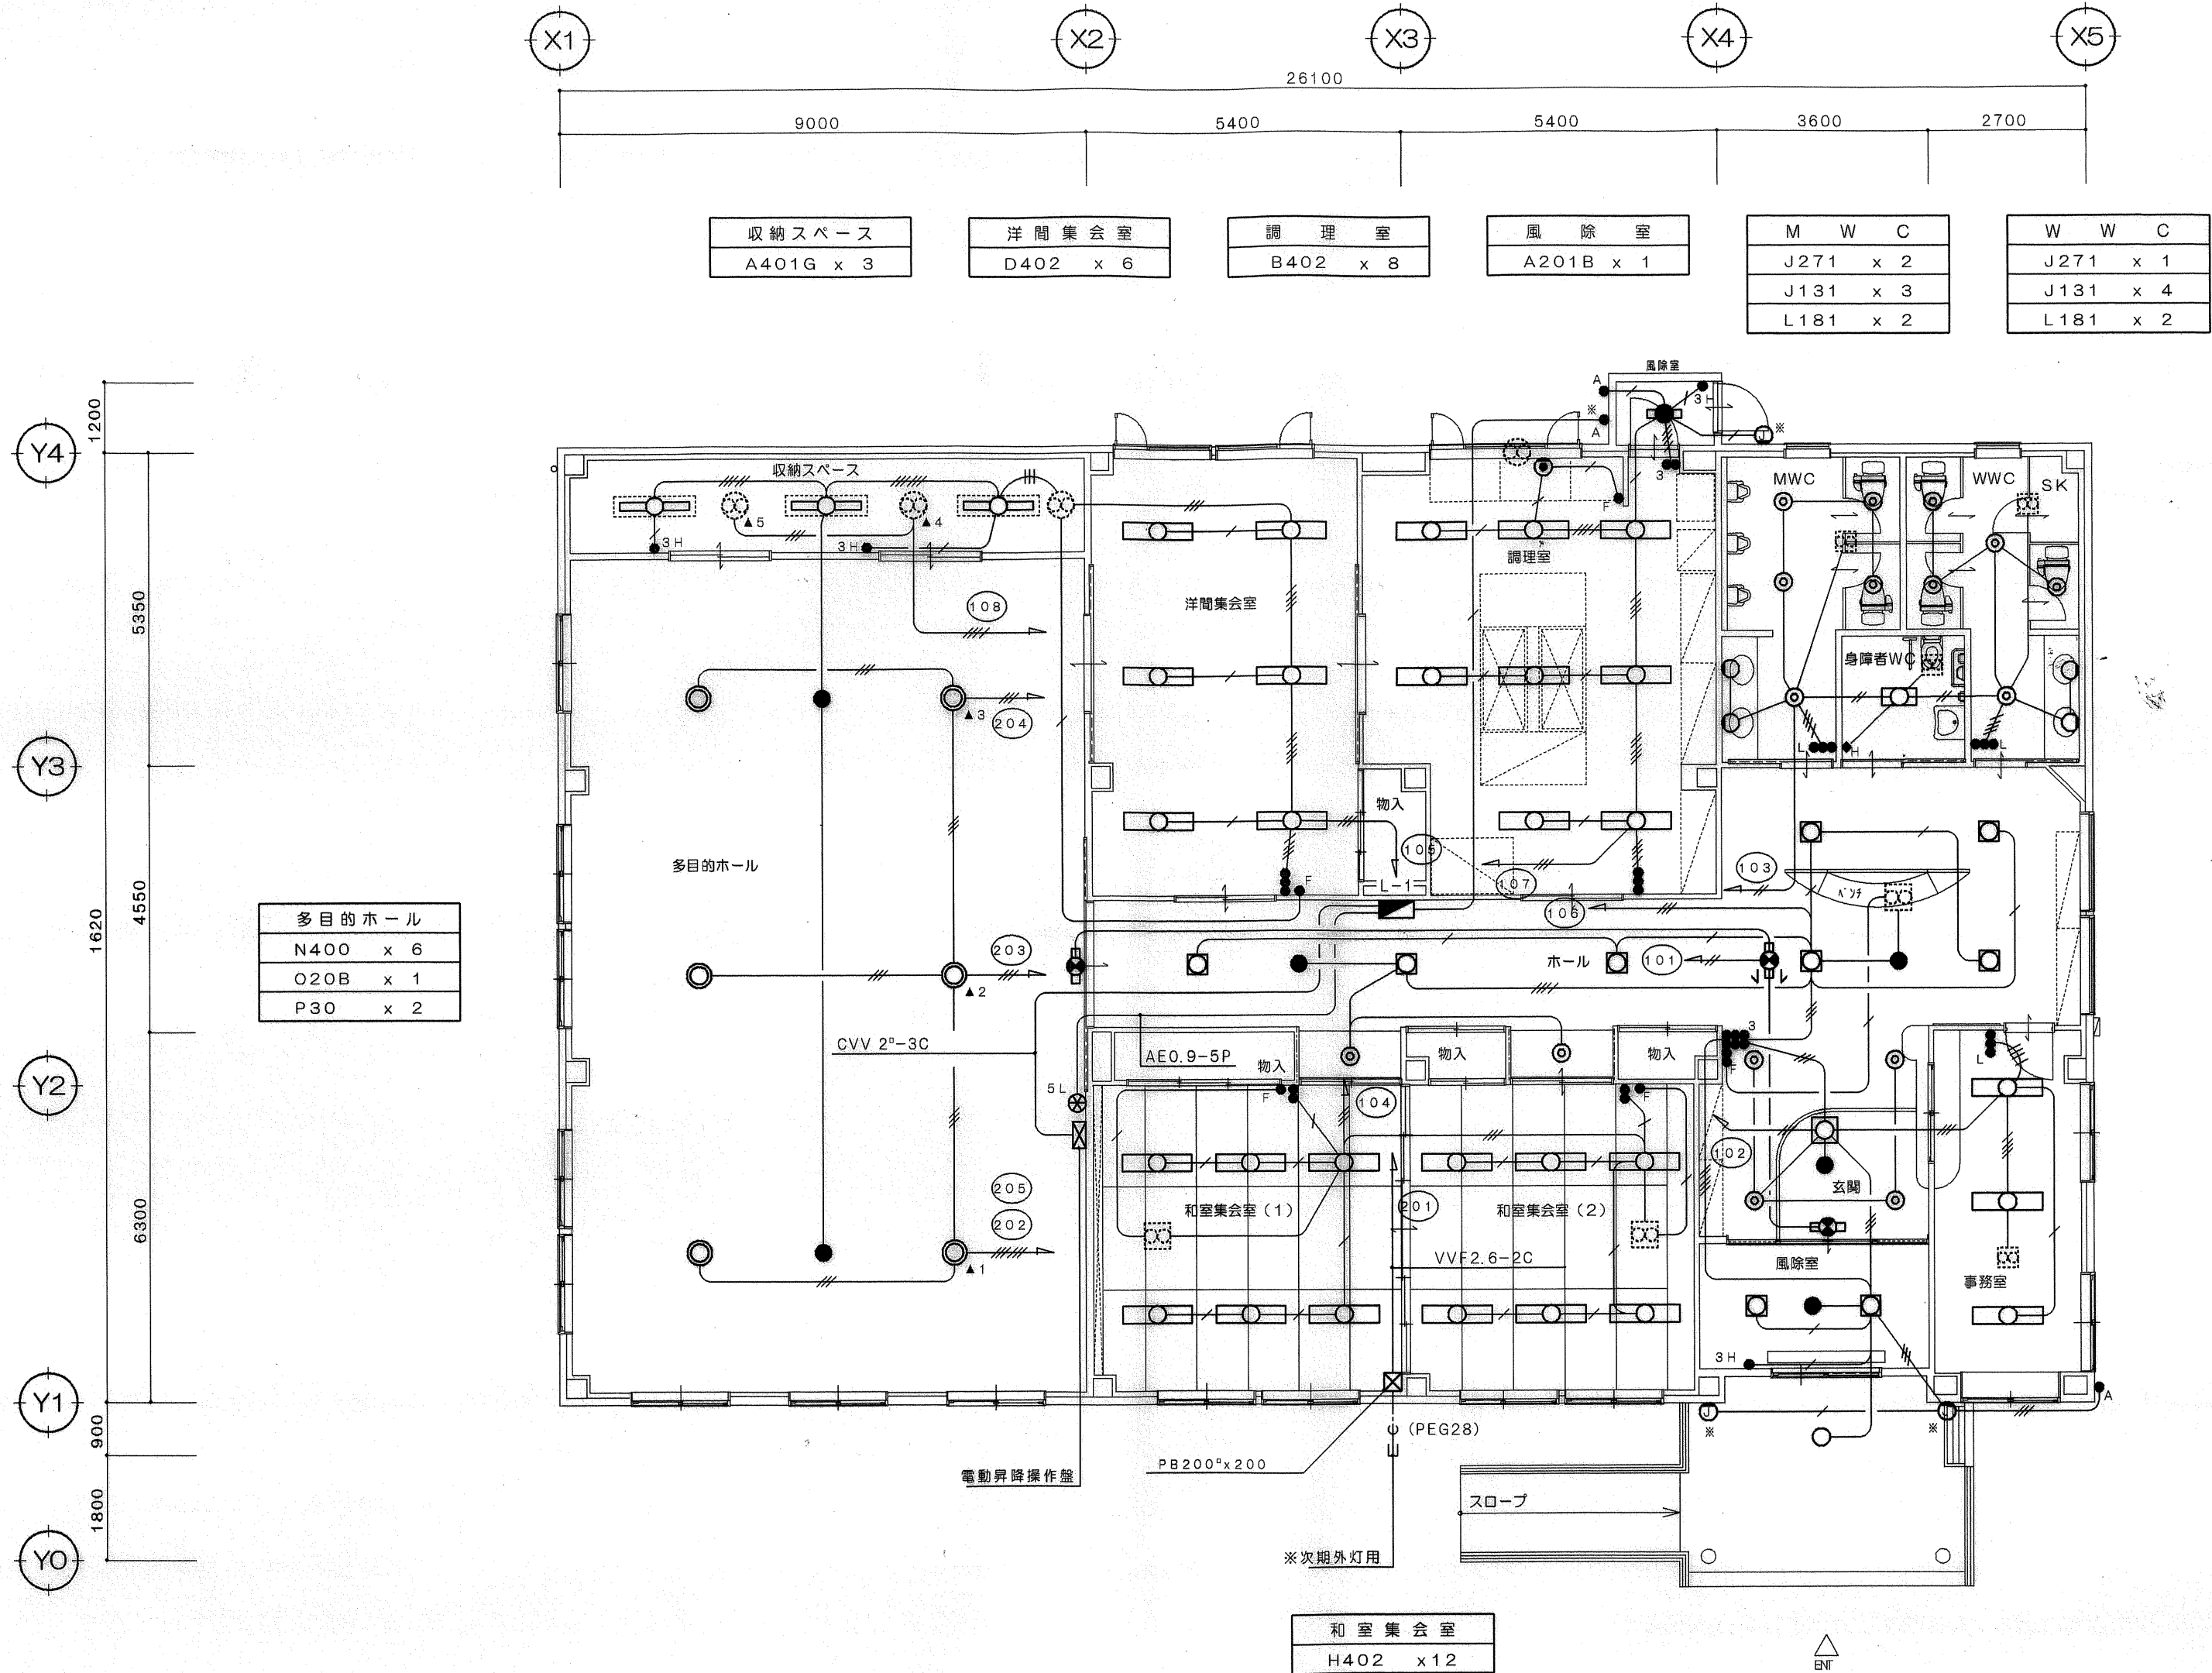

註 記：特記なき配線は下記とし、立上げ立下げ部分はPF電線管保護とする。

———	VVF 2.0-2C
———	VVF 2.0-3C
———	VVF 3.0-2C~2
———	VVF 2.0-3C, 2.0-2C
———	VVF 2.0-3C~2
———	VVF 1.6-2C
———	VVF 1.6-3C

平面図 S=1:100